

Direct and indirect lighting suspended luminaire, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9006.

Light is distributed via a microprismatic cover, suitable for monitor workstations. UGR<19.

Direct: app. 80%, Indirect: app. 20%

Also available as only direct lighting variation.




Type	Lumen Output	System Power	Dimension (l x w x h1 x h2)
Vision 1200 7.0 I bMPS-b	7.000 Lumen	58 Watt	1.200 x 160 x 27 x 50 mm
Vision 1500 8.0 I bMPS-b	8.300 Lumen	70 Watt	1.500 x 160 x 27 x 50 mm

Technical Information:

Voltage:	220-240 V / 50-60 Hz
Protection Class:	1
Protection Type:	IP20
Ballast:	switchable
Cover:	microprismatic
Colour:	RAL 9006
Light Colour:	4.000K
CRI:	RA>80

Dimension Drawing:

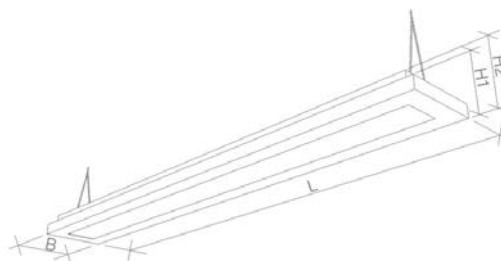

Options:

- Light Colour 3.000K
- Ballast DALI dimmable
- Housing acc. to RAL Card
- Direct lighting
- Variation for surface installation