



System luminaire including ceiling panel, suitable for integration into walkable ceiling systems. Equipped with LED technology. Housing colour is adjusted to the ceiling.

Design with unique LED reflector system and highly efficient all-round glare-free wide-beam light technology (UGR<19). Specially designed for use with high ceilings and/or higher light intensities.

Exemplary illustration
The Type 4.5 has four instead of six LED modules

Revision is done from ceiling-side.


Type	Light system	Approx. size* ca. L x W x H
RR-o 625 LED-U3 4.5 AG	LED 840, 4530 Lm, ca. 31W	1094x1094x120mm
RR-o 625 LED-U3 6.5 AG	LED 840, 6800 Lm, ca. 47W	1094x1094x120mm
RR-o 625 LED-U3 7.5 AG	LED 840, 7860 Lm, ca. 55W	1094x1094x120mm

*depending on ceiling system

Technical Data:

Voltage: 220-240 V / 50-60 Hz
 Protection class: 1
 Protection rating: IP65, IP50 on back side
 Control unit: switchable, optional DALI dimmer
 Elec. connection: coupling on the back side with
 unmounted male and
 female connector 3-pin (DALI
 5-pin)
 Colour: RAL 9016 / customer choice
 Glass: toughened safety glass

Light distribution curve:

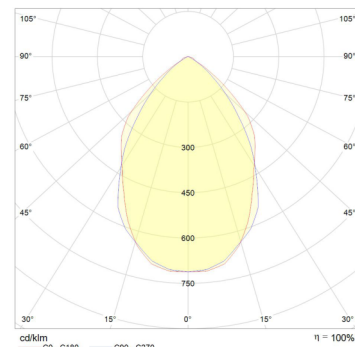

Options:

- emergency light
- elec. connection according to customer requirement
- mounting in other ceiling systems on demand
- silikon tape between frame and safety glass

Scale diagram:

