


Teardrop luminaire with yellow light, equipped with LED technology.

Due to the opal cover in the shape of a teardrop, air turbulences can be avoided.

Variation with special amber-LED modules with focused selective light spectrum. Because of the use of these LED modules an additional filter layer is not required.

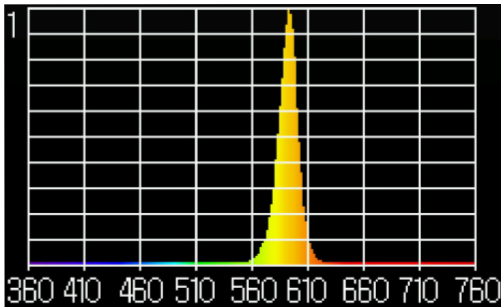

The two-sided coated diffusion layer enables the highest degree of efficiency.

The cover is mounted by stainless steel springs on the inside, without additional tools.


Delivery of single luminaires or delivery for formation of linear lighting strips are possible.

| Type                | Lighting system             | Approx. size<br>W x L x H |
|---------------------|-----------------------------|---------------------------|
| TD-L y5 600 0.5 OA  | LED y5, 800 Lumen, 18 Watt  | 50 x 600 x 90 mm          |
| TD-L y5 1200 1.5 OA | LED y5, 1600 Lumen, 36 Watt | 50 x 1200 x 90 mm         |


#### Technical Data:

- Voltage: 220-240 V / 50-60 Hz
- Protection class: 1
- Protection rating: IP40
- Control unit: switchable, optional DALI dimmer
- elec. connection: internal 3-pin plug (DALI 5-pin) with straight wiring option
- Colour: RAL 9016 / customer choice
- Enclosure: diffuse PMMA profile cover

#### Light distribution curve:



#### Scale diagram:

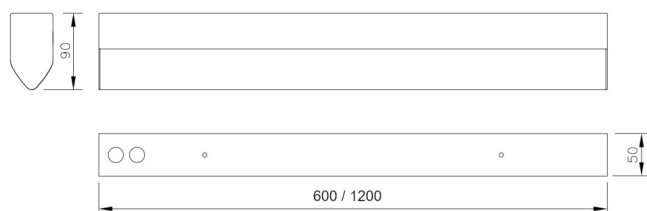

#### Options:

- emergency light
- IP54 (max. two length light-band possible)
- straight wiring
- elec. connection according to customer requirement