


Recessed luminaire for system ceilings, equipped with LED technology.

Housing is made of sheet steel, colour adjusted to ceiling system.

Light is distributed via an opal acrylic cover.

The luminaire can be produced on a project-related basis for different ceiling systems.

Especially due to its high protection rating, it is suitable for wet room areas and clean rooms.

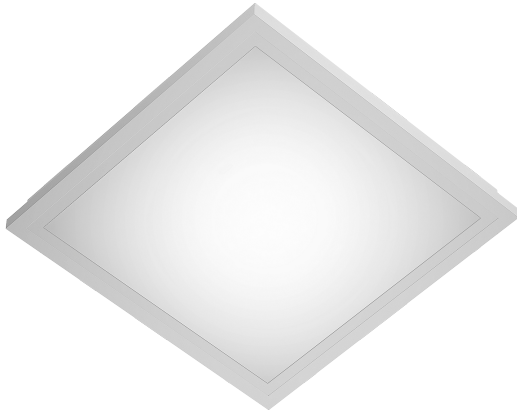

Type	Lumen Output	System Power	Dimension (l x w x h)
FR 625 H 4.0 OS	4.400 Lumen	35 Watt	625 x 625 x 80 mm
FR 625 H 6.0 OS	6.200 Lumen	52 Watt	625 x 625 x 80 mm

Technical Information:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection kind:	IP50 (room-side)
Ballast:	switchable
Cover:	opal
Colour:	suitable to ceiling system
Light colour:	4.000K
Colour rendering:	RA>80

Options:

- Light colour 3.000K
- Ballast DALI dimmable
- Protection IP54 (room-side)
- Microprismatic cover
- Structured ESG cover
- Variation for 600 x 600 mm systems
- Emergency lighting

Dimension Drawing:

