

Flat and frameless integrated luminaire, equipped with LED technology.

The luminaire is integrated into the Lindner fire protection metal ceiling panel (in the factory). Housing Colour is adjusted to ceiling.

Light is distributed via an opal acrylic cover, suitable for general areas.


Delivery inclusive preassembled connection cable, plug and connector.

Type	Lumen Output	System Power	Dimension (l x w x h)
T38 17 - 600 a	1.900 Lumen	16 Watt	600 x 100 x 38 mm
T38 17 - 900 a	3.150 Lumen	26 Watt	900 x 100 x 38 mm
T38 17 - 900 b	2.000 Lumen	17 Watt	900 x 100 x 38 mm
T38 17 - 1200 a	4.000 Lumen	33 Watt	1.200 x 100 x 38 mm
T38 17 - 1200 b	2.300 Lumen	19 Watt	1.200 x 100 x 38 mm
T38 17 - 1500 a	4.770 Lumen	38 Watt	1.500 x 100 x 38 mm
T38 17 - 1500 b	2.750 Lumen	22 Watt	1.500 x 100 x 38 mm

Technical Information:

Voltage:	220-240 V / 50-60 Hz
Protection Class:	1
Protection Type:	IP20
Ballast:	switchable
Cover:	opal
Colour:	suitable to ceiling
Light Colour:	4.000K
CRI:	RA>80

Dimension Drawing:

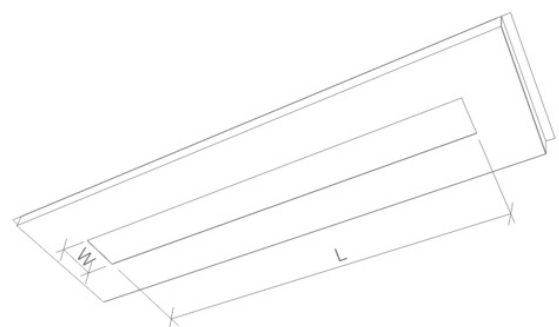

Options:

- Light Colour 3.000K
- Ballast DALI dimmable