


## Product picture

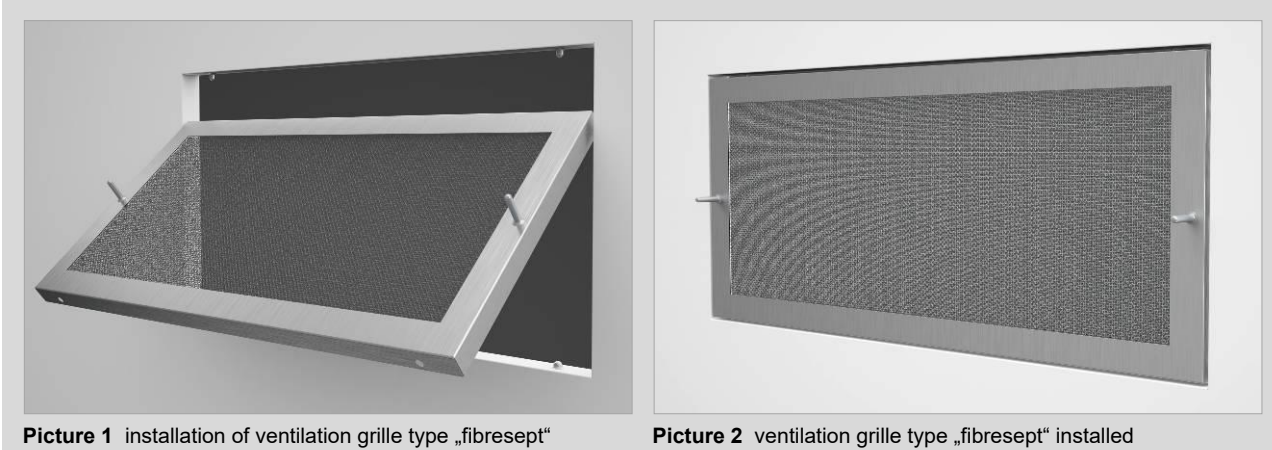

**Picture 1** installation of ventilation grille type „fibresept“

**Picture 2** ventilation grille type „fibresept“ installed

## Description

The lint screen can be used in exhaust air outlets as well as for overflow grilles between rooms and in doors.


The model “fibresept” is designed for the use in operation theatres according to VDI 6022 and DIN 1946.

Due to the low mounting depth the lint screen can be integrated flush with the partition or door independent of the partition thickness. The woven wire cloth allows to achieve an even airflow.

Because of the compact design the lint screen is stable and distortion-resistant. Furthermore the frame shape model is self-supporting and independent of the partition design.

## Technical data

	„fibresept“
Cut-out width:	max. 700 mm
Cut-out height:	max. 700 mm
Air flow rate	max. 4 m/s
Free cross section	approx. 44%
Part-No.	00055445

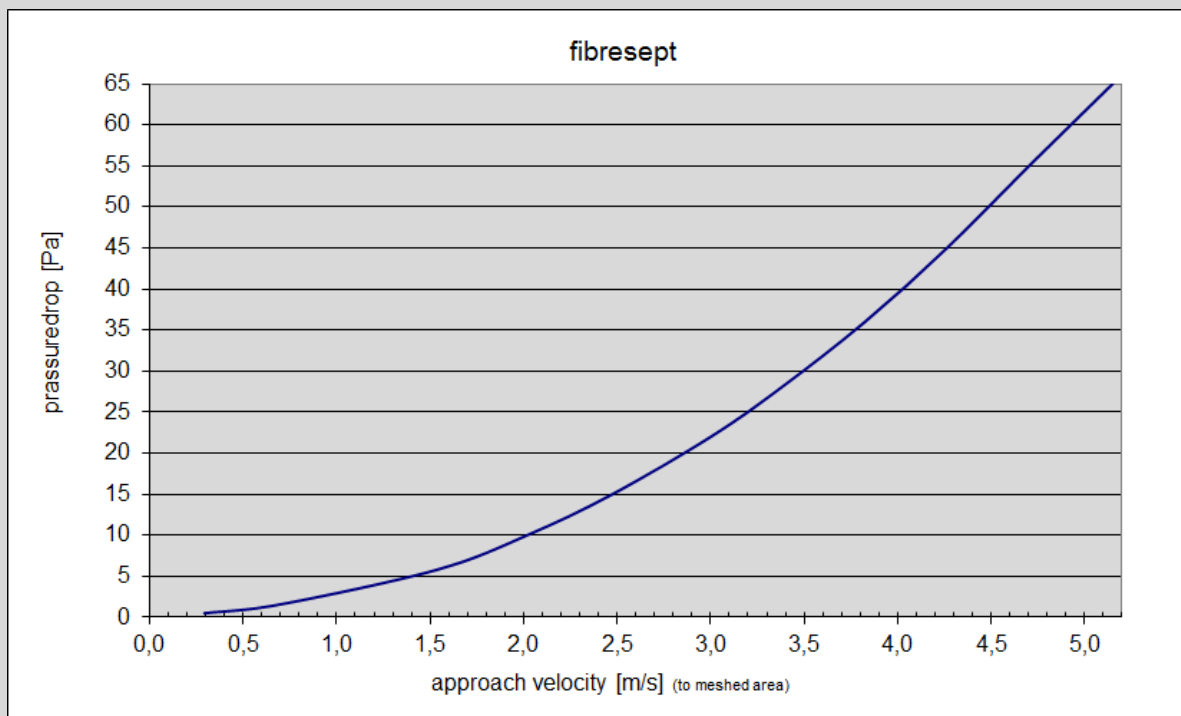

## Material

The following material is available:

- Stainless steel, brushed
- Stainless steel, grinded
- Stainless steel, powder coated (only completely frame and mesh)

We reserve the right to adapt and amend all details and information at any time. We do not accept liability for information that is inadvertently incorrect. This document is protected by copyright law. Processing, unauthorised use or reproduction and public distribution are not permitted. Reproduction and distribution to third parties are only permitted with our express consent.